



## GREE

Singlezone Ducted, Centrally Ducted

AHRI Cert #: **205564529**

Outdoor Unit #: **GUD36W/A-D(U)**

Indoor Unit #: **GUD24A/A-D(U)**

🔥 Maximum Heating Capacity (Btu/hr) @5°F: **24,000**

🔥 Rated Heating Capacity (Btu/hr) @47°F: **24,000**

❄️ Rated Cooling Capacity (Btu/hr) @95°F: **24,000**


### Information Tables

Brand	GREE
Series	
Ducting Configuration	Singlezone Ducted, Centrally Ducted
AHRI Certificate No.	205564529
Outdoor Unit #	GUD36W/A-D(U)
Indoor Unit Type	
Indoor Unit #	GUD24A/A-D(U)
Furnace Unit #	
SEER	20
EER	12.5
HSPF Region IV	10.5
Energy Star	✓
Variable Capacity	✓
Turndown Ratio (Max 5°F/Min 47°F)	2.53
Capacity Maintenance (Max 5°F/Max 47°F)	92%
Capacity Maintenance (Rated 17°F/Rated 47°F)	67%
Capacity Maintenance (Max 5°F/Rated 47°F)	100%
Integration	
Connectivity	
Operational Diagnostics	
Refrigerant(s)	
Sold In	

### Performance Specs

Heating / Cooling	Outdoor Dry Bulb	Indoor Dry Bulb	Unit	Min	Rated	Max
Heating	5°F	70°F	Btu/h	14,500	-	24,000
			kW	1.9	-	3.35
			COP	2.24	-	2.1
Heating	17°F	70°F	Btu/h	13,500	16,300	24,000
			kW	1.4	1.77	2.9
			COP	2.83	2.7	2.43
Heating	47°F	70°F	Btu/h	9,500	24,000	26,000
			kW	0.6	1.68	1.98
			COP	4.64	4.19	3.85
Cooling	82°F	80°F	Btu/h	10,000	-	25,000
			kW	0.54	-	1.47
			COP	5.43	-	4.98
Cooling	95°F	80°F	Btu/h	9,000	24,000	25,000
			kW	0.65	1.92	2.15
			COP	4.06	3.66	3.41

Heating/Cooling Capacity Graph

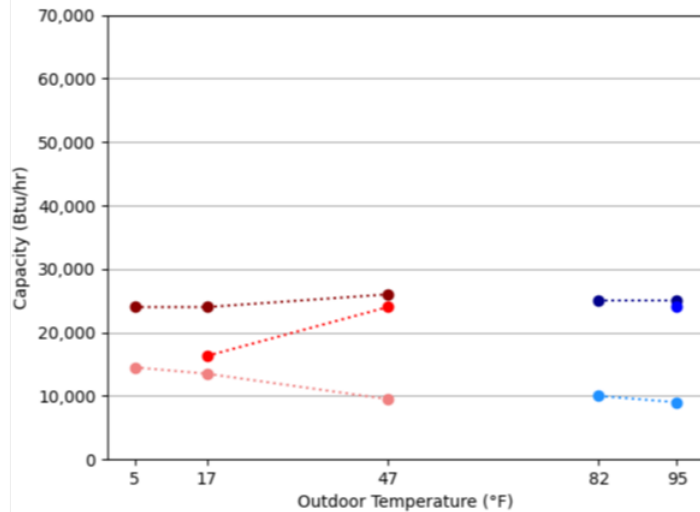

### Pan Heater

Type	N/A
Input Power	160
Model #	

**Operation** When outdoor ambient temperature is below 23°F, the heater will turn on.